MXF 1229 *XSafe*

Modular Ice Machine 570 kg

Scotsman Ice Systems

Item	
Project	
Quantity	



FEATURES

- Top Materials: AISI 304 Stainless steel
- Core Ice System: Stable evaporator system (Axial load).
- New Core Evaporator: Highly balanced auger (double fly system).
- New Gearmotor: Evaporator strability improved and noise free.
- Innovative Ice Breaker: Very dry flake ice - 12% of water contents.
- Durable Operations: High efficiency and better performance.
- Easy to Clean: Facilitated cleaning process and XSafe standard.
- New High-tech Water Sump with easy regulation system.
- New ice level sensor: for seamless operations.
- New Display: Touch & Smart.
- XWave: New App with improved electronics and programming.



MXF 1229
Superflake ice
Residual water content 15%

CONDENSING SYSTEM

SPLIT

REFRIGERANT GAS

R744

VOLTAGE V/HZ/PH

230\50\1

RECOMMENDED BINS

Head	Bins		kg
MXF 1229	CBT30EFSD	**SB393**	181
	CBT30EFSD	**SB530**	243
	CBT42EFSD	**SB550**	252
	CBT48FMCD	**SB948**	406
	CBT52FMCD	**SB1025**	478
	●	**UBH1100**	553
	●	**UBH1600**	812
	●	**SIS700**	318 + 73

LEGEND:

✔ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxxxxx : need additional bin top

CERTIFICATIONS

CE EAC

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 570 kg

April 2026


MXF 1229 *XSafe*

Modular Ice Machine 570 kg

Scotsman Ice Systems

Item	
Project	
Quantity	

Modular Ice Machine 570 kg

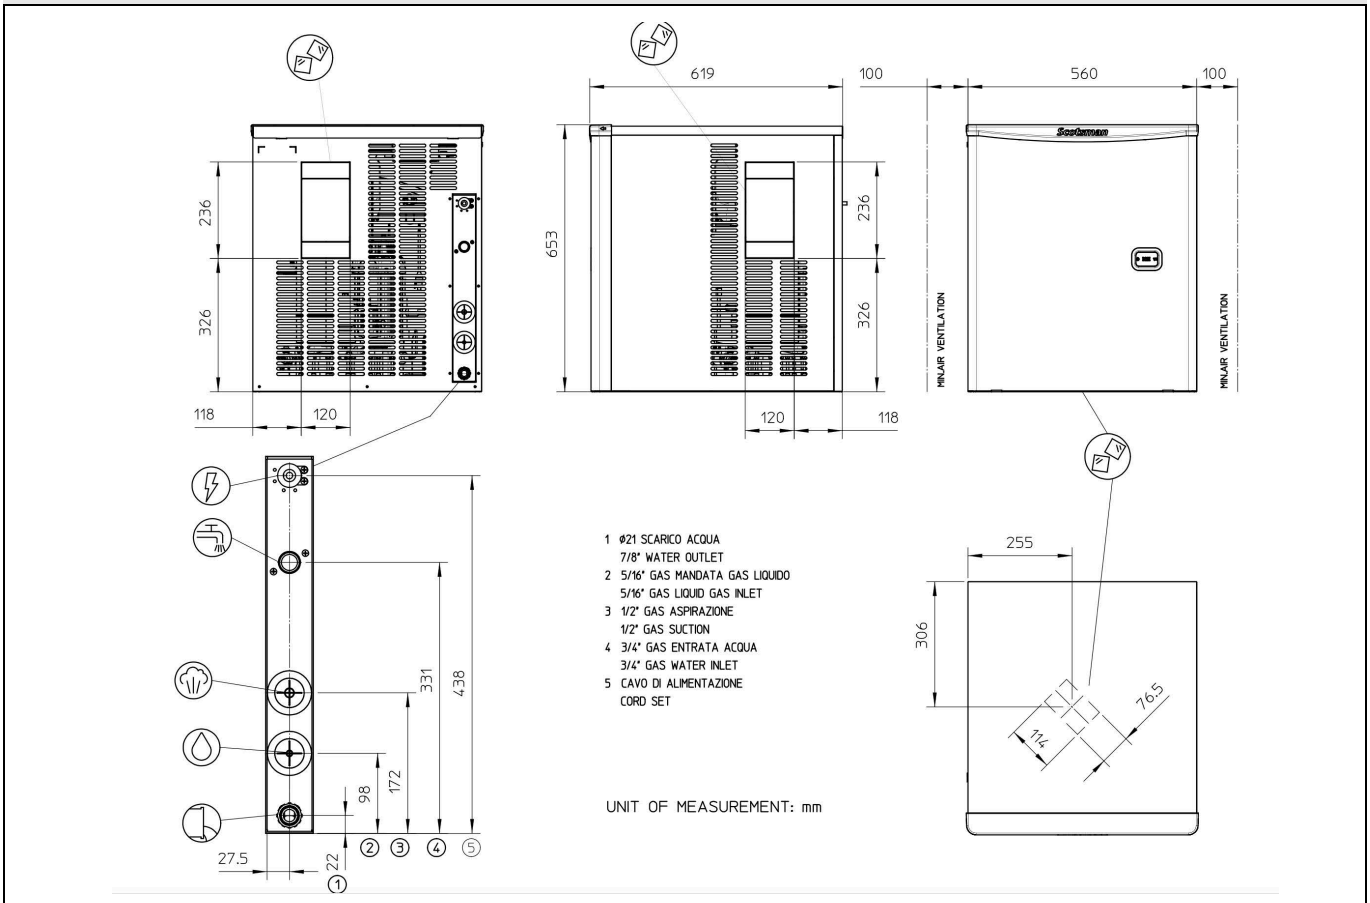

UNIT DATA		**SHIPPING DATA**		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions	
Size (W x D x H)	560 x 619 x 653 mm	Size (W x D x H)	630 x 690 x 830 mm		
Net weight	55 kg	Gross weight	65kg		

			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXF 1229 SPLIT	230\50\1	A	570	535	-	4,3	4,8	21,5	200	3 x 1,5	10