MXF 1237 OX XSafe

Modular ice maker with a capacity of up to 550 kg



FEATURES

- Materials: AISI 304 stainless steel and a new removable grate
- Core Ice System: stable evaporation system (axial load).
- New main evaporator: highly balanced screw (dual-profile system).
- New gearmotor: improved evaporator stability and no noise.
- Innovative ice crusher: very dry ice—12% water content.
- Simplified cleaning process and standard XSafe (automatic sanitization system).
- New high-tech water tray with an easy-to-adjust system.
- New ice level sensor: for uninterrupted operation.
- New display: touchscreen and smart. XWave: New app with improved electronics and programming.



MXF SUPER FLAKE
SUPER FLAKE
-

Model	Cubetto	Ø	H	Weight
MXF SUPER FLAKE				

CONDENSATION SYSTEM
Air
Water

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
400\50\3N

RECOMMENDED CONTAINERS

Container	Compatibility
SB 293	√
NB 393	√
SB 393	√
SB 530	√
SB 550	SCBINTOPMXFSB42
SB 948	SCBINTOPMXFSB48
SB1025	SCBINTOPMXFSB52
UBH 1100	•
UBH 1600	•
SIS 300	•
SIS 700	•

LEGEND
√ : Perfect combination of machine and container
• : Hole for falling ice—to be cut during installation
CBTxxxxxxxxx: Additional accessory required

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

MXF 1237 OX *XSafe*

Scotsman Ice Systems

Modular ice maker with a capacity of up to 550 kg

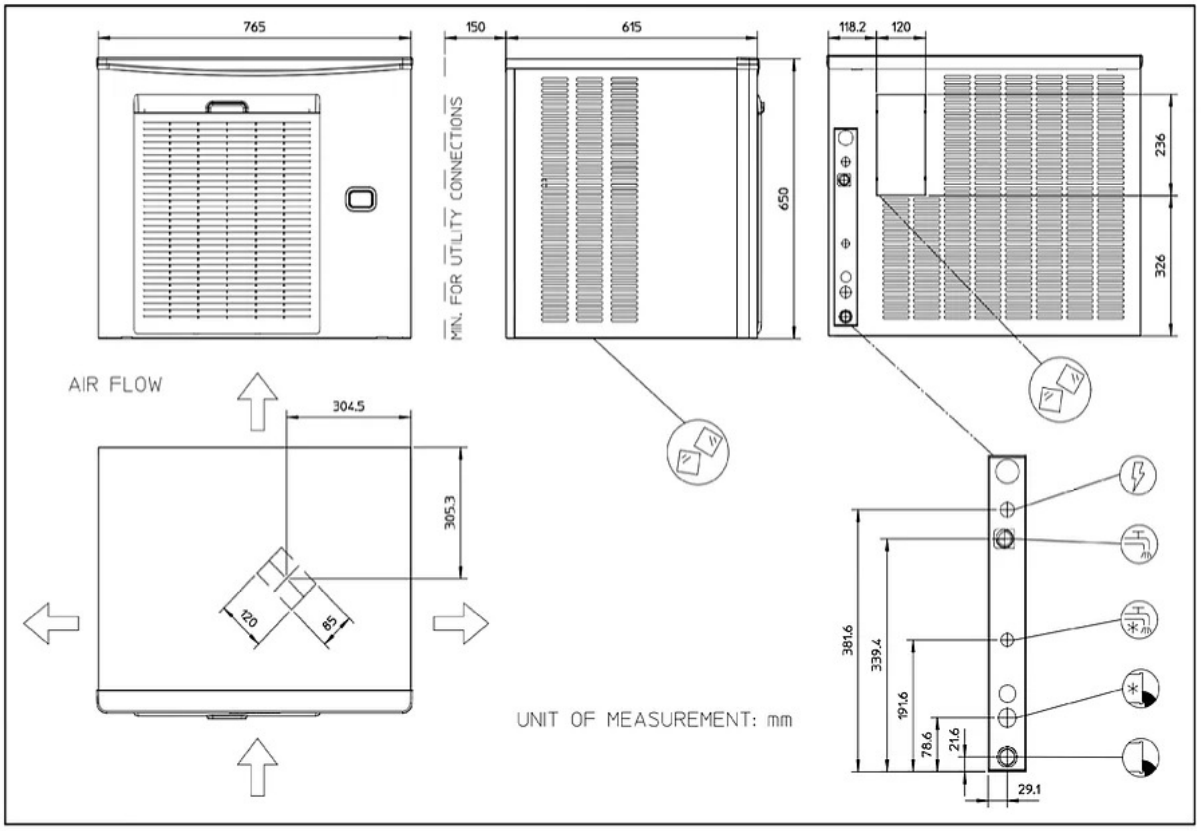

MACHINE SPECIFICATIONS	SHIPPING INFORMATION	(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water (**) Storage and transport temperature: +5 to +43°C
Dimensions (WxDxH): 765 x 615 x 650 mm Net weight 85 kg	Dimensions (WxDxH): 83 x 69 x 83 cm Net weight 98 kg	

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
MXF 1237 AS 230/50/1	230\50\1	A	550	480	360	4,30	45,0	16,0	2050	1,50	16
MXF 1237 AS 400/50/3N	400\50\3N	A	540	473	370	4,00	43,0	16,0	1960	1,50	16
MXF 1237 WS 230/50/1	230\50\1	W	550	520	450	3,80	37,0	157,0	1560	1,50	16