MXF 427 SPA *XSafe*

Scotsman Ice Systems

Modular ice machine with a capacity of up to 247 kg



FEATURES

- Materials: AISI 304 stainless steel and a new removable grate
- Core Ice System: stable evaporation system (axial load).
- New main evaporator: highly balanced screw (dual-profile system).
- New gearmotor: improved evaporator stability and no noise.
- Innovative ice crusher: wetter ice specifically designed for spas and wellness centers. 25% water content
- Long-lasting stainless steel ball bearings.
- Easy access to the front panel of the machine's technical/service area.
- Simplified cleaning process and standard XSafe (automatic sanitization system).
- New display: touchscreen and smart. XWave: New app with improved electronics and programming.
- New ice level sensor: for uninterrupted operation.



MXF SUPER FLAKE
SUPER FLAKE
-

Model	Cubetto	Ø	H	Weight
MXF SUPER FLAKE				

CONDENSATION SYSTEM

Air
Water

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1
220-240\60\1

RECOMMENDED CONTAINERS

Container	Compatibility
SB 193	√
SB 322	√
	√

LEGEND
√ : Perfect combination of machine and container
• : Hole for falling ice—to be cut during installation
CBTxxxxxxxxxx: Additional accessory required

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

MXF 427 SPA *XSafe*

Scotsman Ice Systems

Modular ice machine with a capacity of up to 247 kg

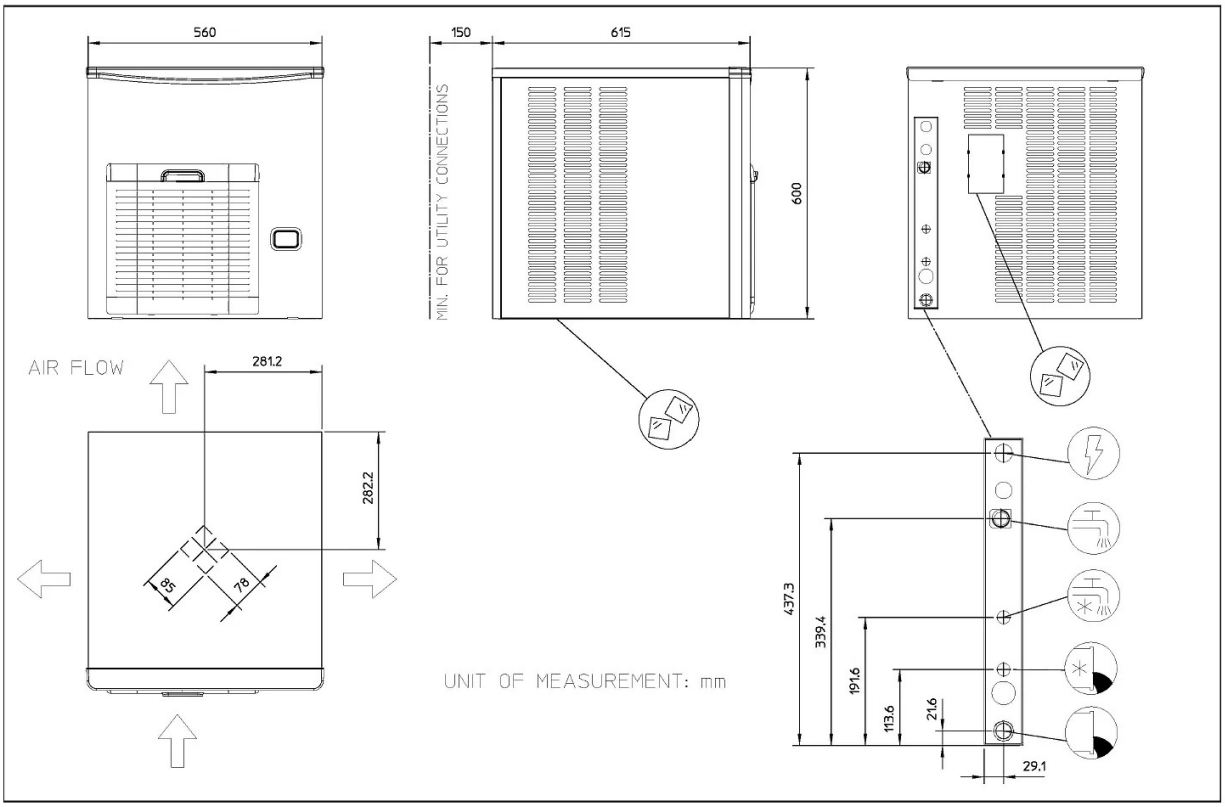

MACHINE SPECIFICATIONS	SHIPPING INFORMATION	
Dimensions (WxDxH): 560 x 615 x 600 mm Net weight 57 kg	Dimensions (WxDxH): 63 x 69 x 78 cm Net weight 66 kg	(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
MXF 427 AS 230/50/1	230\50\1	A	247	216	175	1,40	17,0	8,0	770	1,50	10
MXF 427 WS 230/60/1	220-240\60\1	W	260	259	225	1,90	17,0	121,0	740	1,50	10
MXF 427 WS 230/50/1	230\50\1	W	320	317	268	1,50	14,0	161,0	650	1,50	10