MXF 427 OX XSafe

Modular machines up to 215 kg

Scotsman Ice Systems



CHARACTERISTICS

- Materials: AISI 304 stainless steel and a new removable grate
- Core Ice System: stable evaporation system (axial load).
- New main evaporator: highly balanced screw (dual-profile system).
- New gearmotor: improved evaporator stability and no noise.
- Innovative ice crusher: very dry ice—12% water content.
- Simplified cleaning process and standard XSafe (automatic sanitization system).
- New high-tech water tray with an easy-to-adjust system.
- New ice level sensor: for uninterrupted operation.
- New display: touchscreen and smart. XWave: New app with improved electronics and programming.



MXF SUPER FLAKE
SUPER FLAKE
-

Model	Cubetto	Ø	H	Weight
MXF SUPER FLAKE				

CONDENSATION SYSTEM

Air
Water

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1
220-240\60\1

RECOMMENDED CONTAINERS

Bin	Compatibility
NB 193	√
SB 193	√
SB 322	√
SB 293	SCBINTOPMXFSB30
NB 393	SCBINTOPMXFSB30
SB 393	SCBINTOPMXFSB30
SB 530	SCBINTOPMXFSB30
SB 550	SCBINTOPMXFSB42
SB 948	SCBINTOPMXFSB48
SIS 300	•

LEGEND
√ : Perfect combination of machine and container
• : Ice drop hole to be cut at installation
CBTxxxxxxxxxx : Additional accessory required

CERTIFICATIONS

OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

MXF 427 OX *XSafe*

Scotsman Ice Systems

Modular machines up to 215 kg

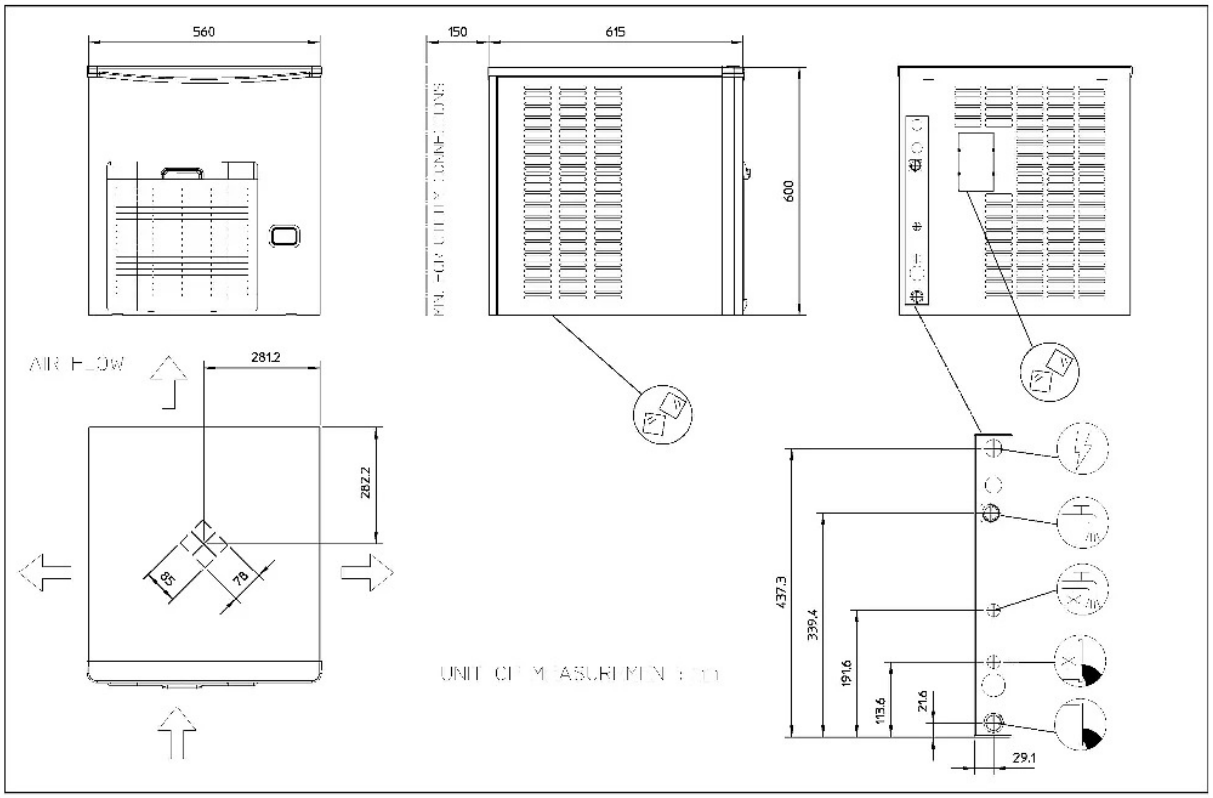

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 560 x 615 x 600 mm Net weight 57 kg	Dimensions (LxWxH): 63 x 69 x 78 cm Net weight 67 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
MXF 427 AS 230/50/1	230\50\1	A	215	187	170	1,40	16,0	8,0	750	1,50	10
MXF 427 WS 230/50/1	230\50\1	W	254	249	212	1,50	15,0	150,0	650	1,50	10
MXF 427 WS 230/60/1	220-240\60\1	W	260	259	225	1,90	17,0	121,0	740	1,50	10
MXF 427 AS 230/60/1	220-240\60\1	A	230	225	184	1,70	21,0	8,0	940	1,50	10