NXW 307 OX XSafe

Scotsman Ice Systems

Modular ice maker with a capacity of up to 150 kg



FEATURES

- Solid Dice Cubes, Half Dice, or Large Dice
- Meets ENERGY STAR and LEED eligibility criteria
- XSafe® AUTOMATIC SANITIZING SYSTEM
- R290 natural refrigerant with a GWP of 3 and an ODP of 0
- COMPACT width of 56 cm, requiring no space on either side
- Very large air intakes that maintain high performance in hot environments
- Hinged front panel for easy cleaning and maintenance
- Tool-free removal of internal parts for cleaning
- Automatic cleaning cycle
- Remote technical support via the free XWave® app.
- Delayed Automatic Start



NXW L
Large Dice Cubes 15 g
- H 28 mm



NXW M
Says medium cube 10 g
- H 22 mm

Model	Cubetto	Ø	H	Weight
NXW L	Large		28 mm	15 g
NXW M	Medium		22 mm	10 g

CONDENSATION SYSTEM

Water
Air

REFRIGERANT GAS

VOLTAGE V/HZ/PH

230\50\1

RECOMMENDED CONTAINERS

Container	Compatibility
SB 193	√
SB 393	SCCBT30EMCD0000
SB 530	SCCBT30EMCD0000

LEGEND
√ : Perfect combination of machine and container
• : Hole for falling ice—to be cut during installation
CBTxxxxxxxxxx: Additional accessory required

CERTIFICATIONS

CE UKCA

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

NXW 307 OX *XSafe*

Scotsman Ice Systems

Modular ice maker with a capacity of up to 150 kg

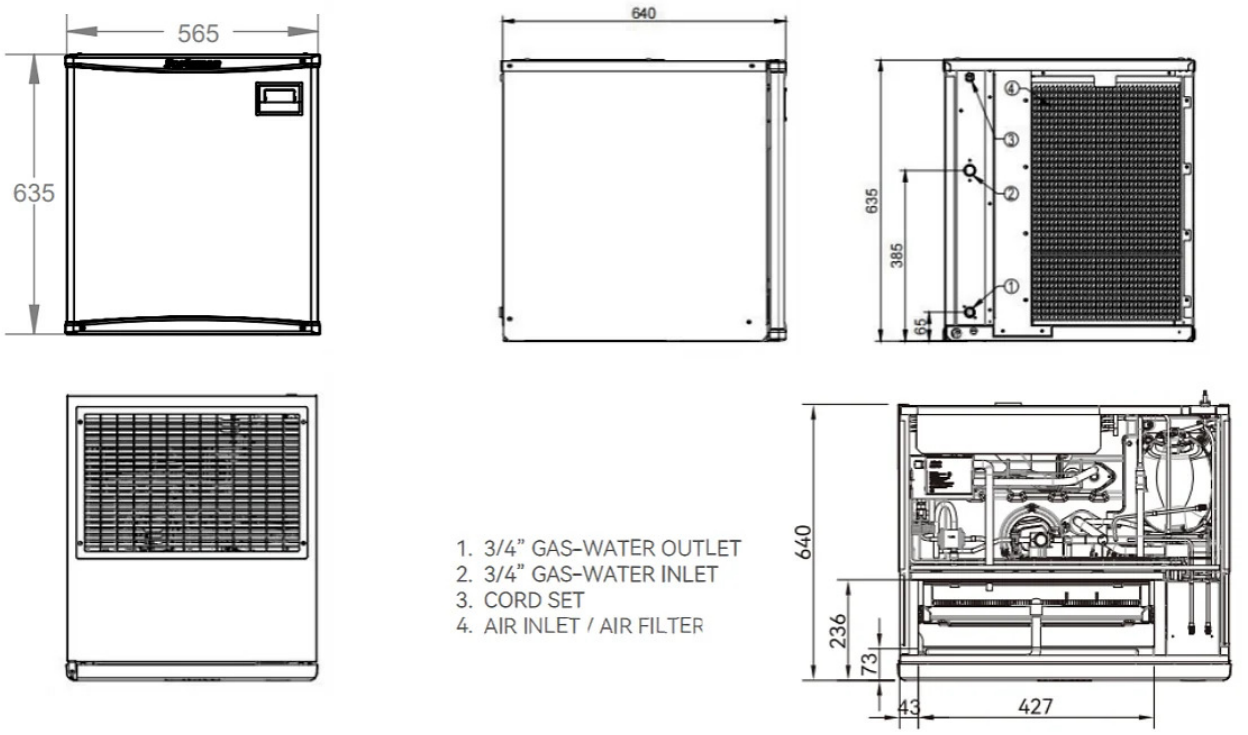

MACHINE SPECIFICATIONS
Dimensions (WxDxH):
Dimensions (WxDxH): 565 x 640 x 635 mm
Dimensions (WxDxH): 560 x 610 x 609 mm
Net weight 75 kg

SHIPPING INFORMATION
Dimensions (WxDxH): 82 x 70 x 77 cm
Net weight 91 kg

(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
NXW 307 W 230/50/1	230\50\1	W	145	153	135	0,00	10,0	94,0	464	1,50	10
NXW 307 A 230/50/1	230\50\1	A	138	130	100	1,60	13,0	7,0	600	1,50	10
NXWL 307 W 230/50/1	230\50\1	W	145	149	131	0,00	10,0	146,0	461	1,50	10
NXWH 307 A 230/50/1	230\50\1	A	150	140	115	1,60	14,0	8,0	600	1,50	10
NXWL 307 A 230/50/1	230\50\1	A	150	130	105	1,60	14,0	7,0	600	1,50	10
NXWH 307 W 230/50/1	230\50\1	W	153	160	143	0,00	11,0	119,0	470	1,50	10