NXW 457 OX XSafe

Modular ice maker with a capacity of up to 200 kg



FEATURES

- Solid Dice Cubes, Half Dice, or Large Dice
- Meets ENERGY STAR and LEED eligibility criteria
- XSafe® AUTOMATIC SANITIZING SYSTEM
- R290 natural refrigerant with a GWP of 3 and an ODP of 0
- Very large air intakes that maintain high performance in hot environments
- Hinged front panel for easy cleaning and maintenance
- Tool-free removal of internal parts for cleaning
- Automatic cleaning cycle
- Remote technical support via the free XWave® app.
- Delayed Automatic Start



NXW L
Large Dice Cubes 15 g
- H 28 mm



NXW M
Says medium cube 10 g
- H 22 mm

Model	Cubetto	Ø	H	Weight
NXW L	Large		28 mm	15 g
NXW M	Medium		22 mm	10 g

CONDENSATION SYSTEM
Air

Water

REFRIGERANT GAS

VOLTAGE V/HZ/PH
230\50\1

RECOMMENDED CONTAINERS

Container	Compatibility
SB 393	√
SB 530	√
SB 948	SCCBT48FMCD0000

LEGEND
√ : Perfect combination of machine and container
• : Hole for falling ice—to be cut during installation
CBTxxxxxxxxxx: Additional accessory required

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

NXW 457 OX *XSafe*

Scotsman Ice Systems

Modular ice maker with a capacity of up to 200 kg

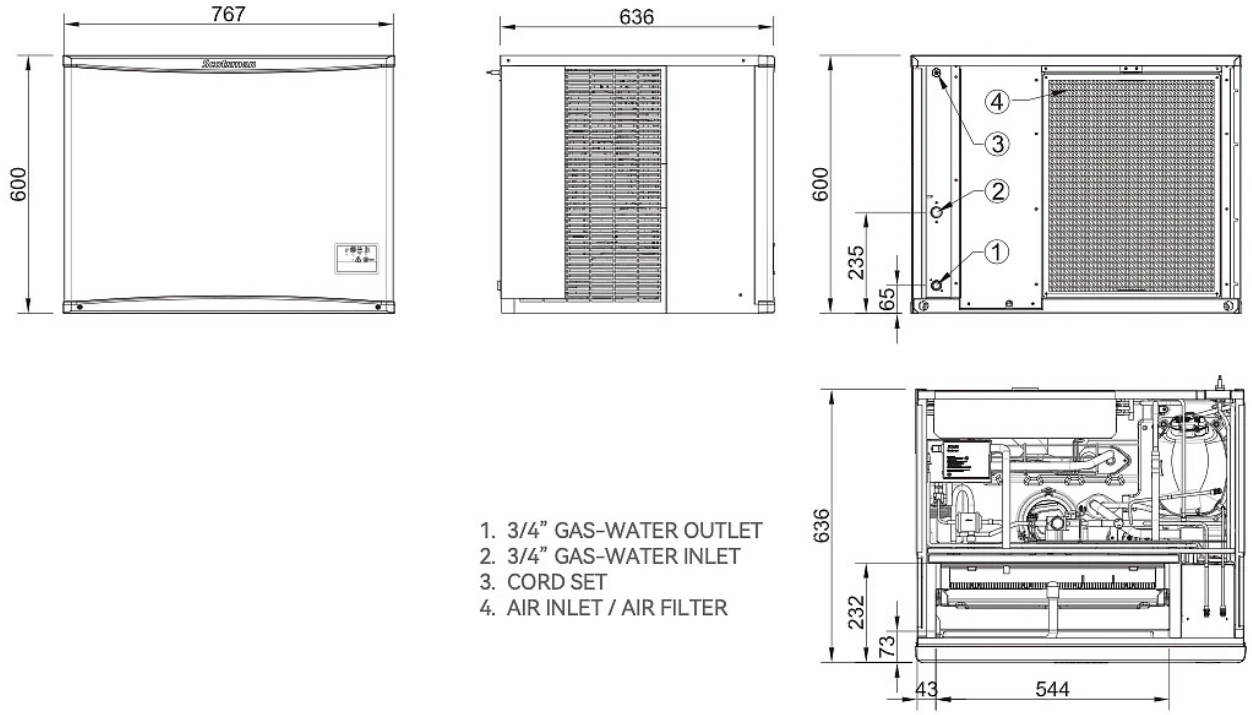

MACHINE SPECIFICATIONS	SHIPPING INFORMATION	
Dimensions (WxDxH): 767 x 636 x 600 mm Dimensions (WxDxH): Net weight 72 kg	Dimensions (WxDxH): 70 x 82 x 77 cm Net weight 87 kg	(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
NXW 457 A 230/50/1	230\50\1	A	200	190	150	2,40	18,0	9,0	785	1,50	10
NXWH 457 A 230/50/1	230\50\1	A	200	190	150	2,40	18,0	8,0	785	1,50	10
NXWL 457 A 230/50/1	230\50\1	A	200	190	150	2,40	17,0	8,0	785	1,50	10
NXW 457 W 230/50/1	230\50\1	W	184	183	170	0,00	15,0	91,0	658	1,50	16
NXWL 457 W 230/50/1	230\50\1	W	189	195	174	0,00	14,0	109,0	634	1,50	16
NXWH 457 W 230/50/1	230\50\1	W	191	202	182	0,00	15,0	113,0	647	1,50	16