NXW 607 OX XSafe

Modular ice maker with a capacity of up to 300 kg



FEATURES

- Solid Dice Cubes, Half Dice, or Large Dice
- Meets ENERGY STAR and LEED eligibility criteria
- XSafe® AUTOMATIC SANITIZING SYSTEM
- R290 natural refrigerant with a GWP of 3 and an ODP of 0
- Very large air intakes that maintain high performance in hot environments
- Hinged front panel for easy cleaning and maintenance
- Tool-free removal of internal parts for cleaning
- Automatic cleaning cycle
- Remote technical support via the free XWave® app.
- Delayed Automatic Start



NXW L
Large Dice Cubes 15 g
- H 28 mm



NXW M
Says medium cube 10 g
- H 22 mm

Model	Cubetto	Ø	H	Weight
NXW L	Large		28 mm	15 g
NXW M	Medium		22 mm	10 g

CONDENSATION SYSTEM
Air

Water

REFRIGERANT GAS

VOLTAGE V/HZ/PH
230\50\1

RECOMMENDED CONTAINERS

Container	Compatibility
SB 393	√
SB 530	√
SB 948	SCCBT48FMCD0000

LEGEND
√ : Perfect combination of machine and container
• : Hole for falling ice—to be cut during installation
CBTxxxxxxxxxx: Additional accessory required

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%


IMPORTANT NOTE
Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

NXW 607 OX *XSafe*

Scotsman Ice Systems

Modular ice maker with a capacity of up to 300 kg

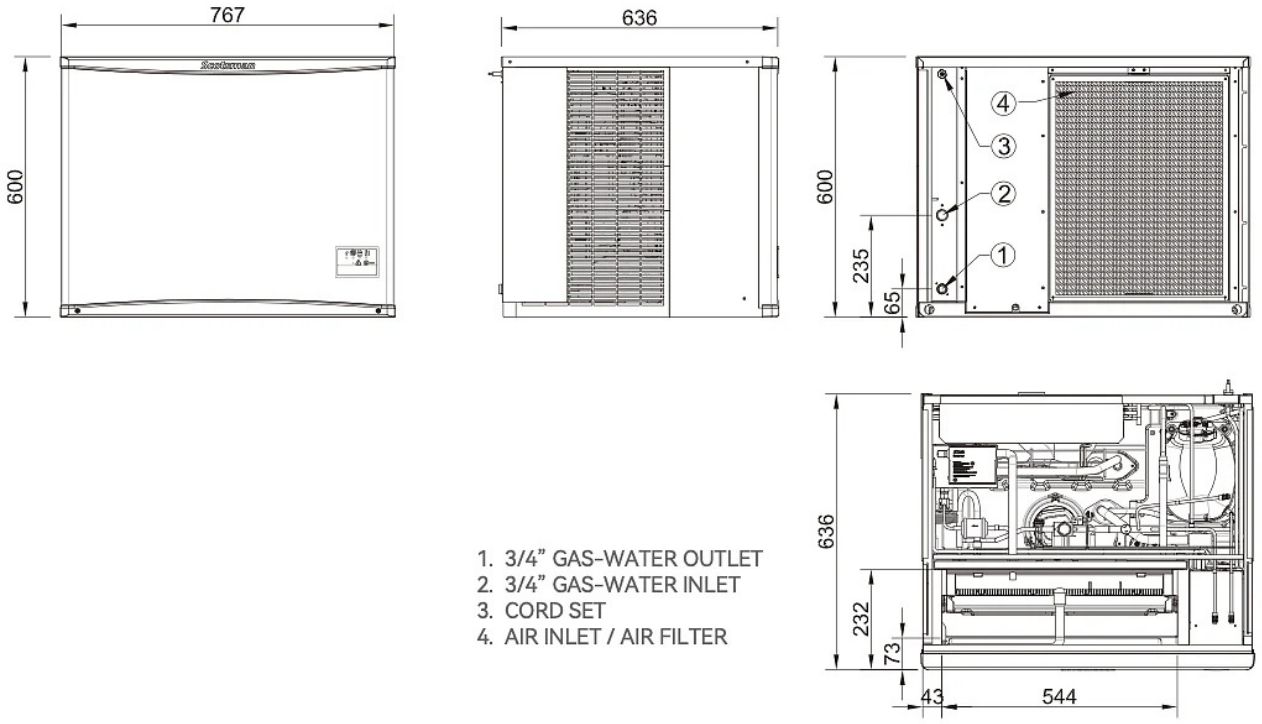

1. 3/4" GAS-WATER OUTLET
2. 3/4" GAS-WATER INLET
3. CORD SET
4. AIR INLET / AIR FILTER

MACHINE SPECIFICATIONS	SHIPPING INFORMATION	
Dimensions (WxDxH): 767 x 636 x 600 mm Dimensions (WxDxH): Net weight 73 kg	Dimensions (WxDxH): 70 x 82 x 77 cm Net weight 88 kg	(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
NXW 607 A 230/50/1	230\50\1	A	300	280	240	2,60	25,0	13,0	990	1,50	16
NXWH 607 A 230/50/1	230\50\1	A	290	280	230	2,60	23,0	13,0	990	1,50	16
NXWL 607 A 230/50/1	230\50\1	A	300	280	230	2,60	23,0	13,0	990	1,50	16
NXWL 607 W 230/50/1	230\50\1	W	285	286	258	0,00	20,0	173,0	877	1,50	16
NXW 607 W 230/50/1	230\50\1	W	268	270	257	0,00	20,0	148,0	900	1,50	16
NXWH 607 W 230/50/1	230\50\1	W	284	290	255	0,00	20,0	162,0	883	1,50	16