DXN 187

Water and ice dispenser with a capacity of up to 140 kg



FEATURES

• Ideal for free self-service stations with a capacity of up to 2,400 glasses filled per day and capable of dispensing ice to up to 200 customers in line at the same time.
• Compact ice or ice-and-water dispenser with an eye-catching, contemporary “touch-screen” design.
• Available in both touch-free and push-button versions.
• You can select either ice only or ice and water at the dispenser, as well as the desired ice dispensing duration (from 1" to 15" or continuous).
• A quick and intuitive cleaning process for the end user.
• A comprehensive overview of settings and errors for the preventive maintenance service.
• Accessory: Upon request, it can be installed on a custom-designed piece of furniture.



DXN S
Small
-

Model	Cubetto	Ø	H	Weight
DXN S				

CONDENSATION SYSTEM
Air

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
220-240\60\1
230\50\1

BIN CAPACITY

KG
7
10

CERTIFICATIONS

OPERATING REQUIREMENTS


	Minimum	Maximum
Air temperature	10	38
Water Temperature	5	38
Water Pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE
Models and specifications are subject to change without notice. The spec sheet is intended for marketing purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

DXN 187

Water and ice dispenser with a capacity of up to 140 kg

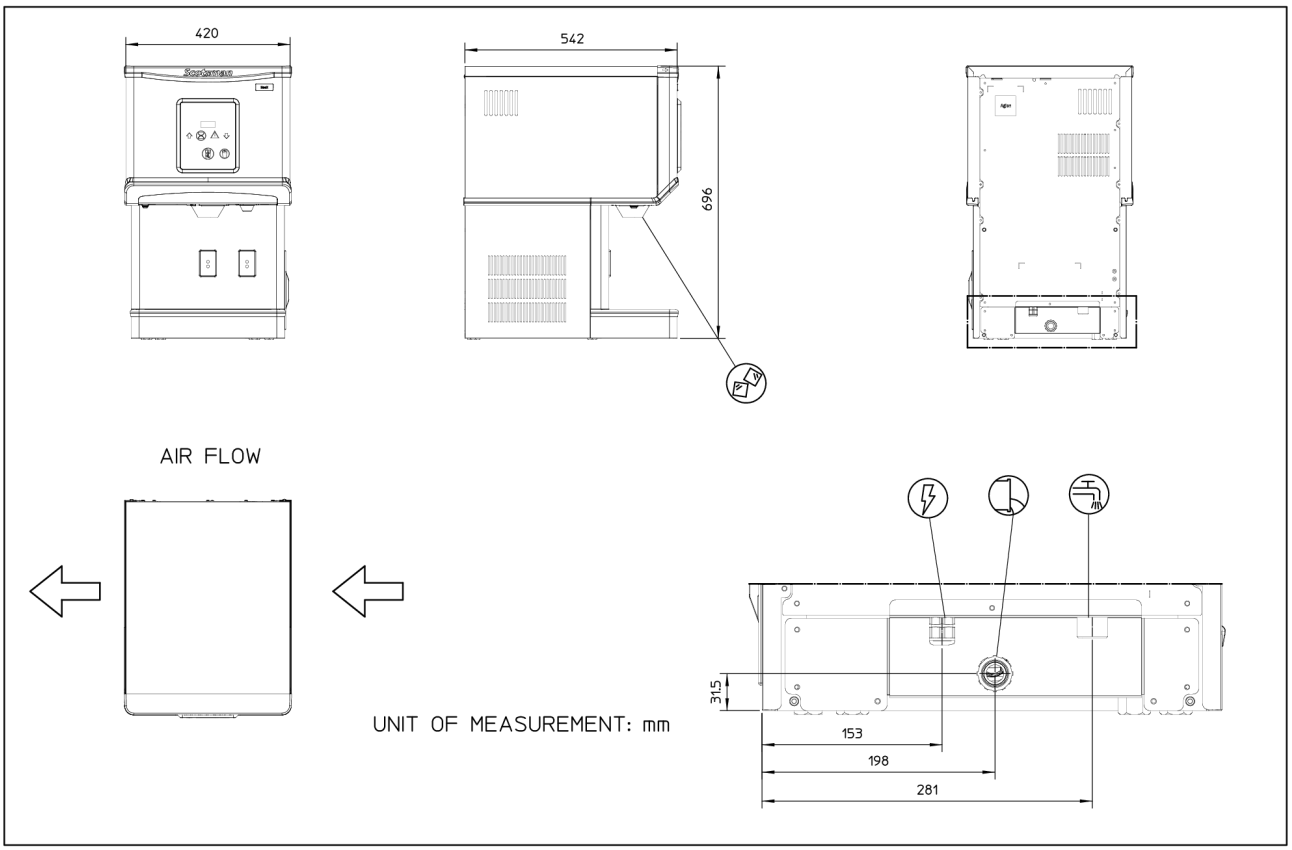

MACHINE SPECIFICATIONS	SHIPPING INFORMATION	
Dimensions (WxDxH): 427 x 552 x 699 mm Net weight 53 kg	Dimensions (WxDxH): 49 x 61 x 87 cm Net weight 60 kg	(*) The data are based on the following temperature conditions: 32°C ambient / 21°C water

			Ice Production (kg) in 24 Hours Ambient °C / Water °C			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instantaneous power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
DXN 187A 230/60/1 TFREE	220-240\60\1	A	160	140	115	1,40	15,0	5,0	635	1,50	10
DXN 187A 230/50 TFREE	230\50\1	A	140	125	95	1,20	13,0	4,0	550	1,50	10
DXN 187A 230/60/1 TOUCH	220-240\60\1	A	160	140	115	1,40	15,0	5,0	635	1,50	10
DXN 187A 230/50 TOUCH	230\50\1	A	140	125	95	1,20	13,0	4,0	550	1,50	10